



TOS three-jaw lathe chuck IUG, Ø=125 mm

according to DIN 6350, + through-drilled

Product.Nr. [243809.123220](#)

EUR 331,90

add. 19 % VAT [excl. shipping costs](#)

weight 4,80 KG

Image may differ in variants / sizes

Centre mount, cast iron, according to DIN 6350


These lathe chucks guarantee homogeneous clamping forces by self-centering jaws and a high concentricity

Type: STANDARD, runout according to DIN 6386 class 2

Scope of delivery:

- 1 set internally stepped jaws
- 1 set externally stepped jaws
- 1 key
- fixing screws

Ø mm	E H6 mm	F mm	G	H mm	J mm	K mm	O mm	P	S mm	T mm	R mm	Runout max. mm	Art.-no.
80	56	67	3xM6	35,5	13	6	16,5	3x7	3	45	15	0,04	243809.083220
100	70	83	3xM8	41,5	17	8	18,0	3x9	3	52	20	0,04	243809.103220
125	95	108	3xM8	51,5	19	8	22,0	3x9	4	58	32	0,04	243809.123220
160	125	140	3xM10	66,0	23	9	22,0	3x11	4	62	42	0,04	243809.163220
200	160	176	3xM10	74,0	29	11	27,5	3x11	4	76	55	0,04	243809.203220
250	200	224	3xM12	97,5	33	12	29,5	3x13	5	82	76	0,07	243809.253220
315	260	286	3xM16	123,0	40	14	35,0	3x17	5	100	103	0,07	243809.313220
400	330	362	3xM16	152,5	50	17	39,0	3x17	5	110	136	0,07	243809.403220

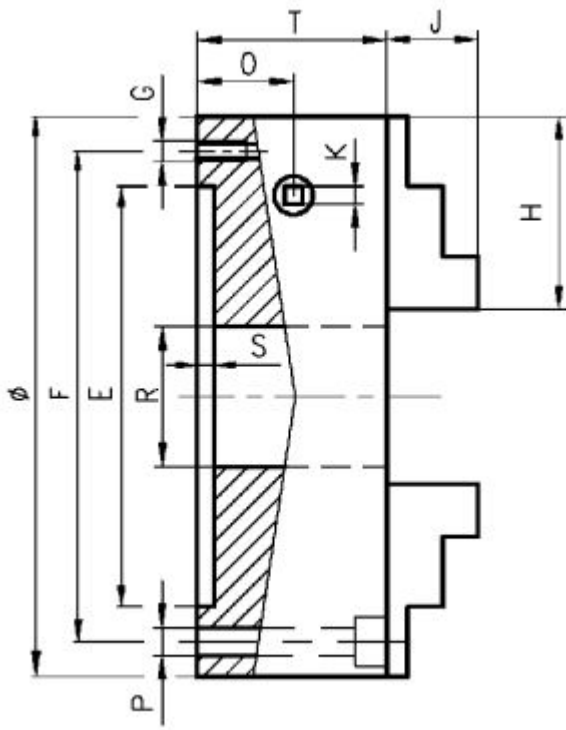

Montag, 29 April 2024, 03:36 Uhr