


# Dreibacken-Drehfutter Three-jaw lathe chucks

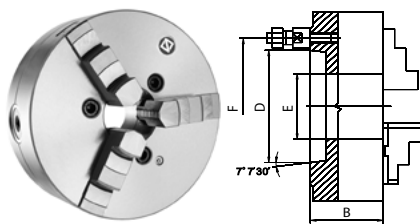


## Kurzkegelaufnahme nach DIN 55027, einteilige Backen According to DIN 55027, one-piece jaws

### Stahl / Steel

Ø mm	KK Taper	B mm	D mm	E mm	F mm	RPM <sub>MAX</sub> min <sup>-1</sup>	kg	Art.-Nr./ Order no.	EUR
125	3	59,5	54	35,5	75	4800	5	<a href="#">ZE-8357-123</a>	376,30
125	4	59,5	63,5	35,5	85	4800	5	<a href="#">ZE-8357-124</a>	376,30
160	4	68	63,5	42	85	4500	9	<a href="#">ZE-8357-164</a>	434,50
160	5	68	82,6	42	104,8	4500	9	<a href="#">ZE-8357-165</a>	434,50
200	4	78	63,5	55	85	4000	19	<a href="#">ZE-8357-204</a>	551,40
200	5	78	82,6	55	104,8	4000	19	<a href="#">ZE-8357-205</a>	561,90
200	6	78	106,4	55	133,4	4000	19	<a href="#">ZE-8357-206</a>	561,90
250	6	89	106,4	76	133,4	3500	32	<a href="#">ZE-8357-256</a>	743,30
250	8	89	139,7	76	171,4	3500	32	<a href="#">ZE-8357-258</a>	743,30
315	6	96,2	106,4	103	133,4	2800	51	<a href="#">ZE-8357-316</a>	1.109,80
315	8	96,2	139,7	103	171,4	2800	51	<a href="#">ZE-8357-318</a>	1.109,80
315	11	117,7	196,9	103	235	2800	51	<a href="#">ZE-8357-311</a>	1.109,20
400	8	108	139,7	136	171,4	2000	101	<a href="#">ZE-8357-408</a>	1.752,20
400	11	108	196,9	136	235	2000	101	<a href="#">ZE-8357-411</a>	1.752,20

Inkl. je 1 Satz Dreh- und Bohrbacken, Spanschlüssel, Befestigungsbolzen  
Incl. 1 set each of solid jaws internally / externally stepped, wrench, fixing bolts

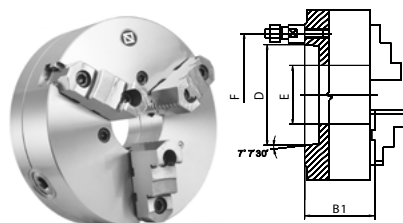

## Kurzkegelaufnahme nach DIN 55027, geteilte Backen According to DIN 55027, two-piece jaws

### Stahl / Steel

Ø mm	KK Taper	B1 mm	D mm	E mm	F mm	RPM <sub>MAX</sub> min <sup>-1</sup>	kg	Art.-Nr./ Order no.	EUR
125	3	64,8	54	35,5	75	4800	5	<a href="#">ZE-8367-123</a>	426,00
125	4	64,8	63,5	35,5	85	4800	5	<a href="#">ZE-8367-124</a>	426,00
160	4	72,8	63,5	42	85	4500	9	<a href="#">ZE-8367-164</a>	476,80
160	5	72,8	82,6	42	104,8	4500	9	<a href="#">ZE-8367-165</a>	476,80
200	5	82,8	82,6	55	104,8	4000	19	<a href="#">ZE-8367-205</a>	586,00
200	6	82,8	106,4	55	133,4	4000	19	<a href="#">ZE-8367-206</a>	586,00
250	6	92,8	106,4	76	133,4	3500	32	<a href="#">ZE-8367-256</a>	776,30
250	8	92,8	139,7	76	171,4	3500	32	<a href="#">ZE-8367-258</a>	776,30
315	6	101,3	106,4	103	133,4	2800	51	<a href="#">ZE-8367-316</a>	1.176,30
315	8	101,3	139,7	103	171,4	2800	51	<a href="#">ZE-8367-318</a>	1.176,30
400	8	116,8	139,7	136	171,4	2000	101	<a href="#">ZE-8367-408</a>	1.860,50
400	11	116,8	196,9	136	235	2000	101	<a href="#">ZE-8367-411</a>	1.860,50

Inkl. je 1 Satz gehärteter Grund- und Umkehrsaufsatzbacken, Spanschlüssel, Befestigungsbolzen  
Incl. 1 set each of hardened base jaws and reversible top jaws, wrench, fixing bolts