


Dreibacken-Drehfutter Three-jaw lathe chucks

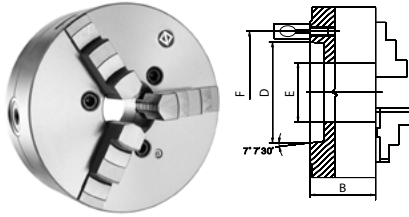


Kurzkegelaufnahme DIN 55029 (Camlock), einteilige Backen According to DIN 55029 (Camlock), one-piece jaws

Stahl / Steel

Ø mm	KK Taper	B mm	D mm	E mm	F mm	RPM _{MAX} min-1	kg	Art.-Nr./ Order no.	EUR
125	3	59,5	54	35,5	70,6	4800	5	ZE-8359-123	412,70
125	4	59,5	63,5	35,5	82,6	4800	5	ZE-8359-124	412,70
160	3	68	54	42	70,6	4500	9	ZE-8359-163	479,20
160	4	68	63,5	42	82,6	4500	9	ZE-8359-164	479,20
160	5	68	82,6	42	104,8	4500	9	ZE-8359-165	479,20
200	4	78	63,5	55	82,6	4000	19	ZE-8359-204	585,70
200	5	78	82,6	55	104,8	4000	19	ZE-8359-205	585,70
200	6	78	106,4	55	133,4	4000	19	ZE-8359-206	585,70
250	6	89	106,4	76	133,4	3500	32	ZE-8359-256	798,60
250	8	89	139,7	76	171,4	3500	32	ZE-8359-258	798,60
315	6	96,2	106,4	103	133,4	2800	51	ZE-8359-316	1.239,10
315	8	96,2	139,7	103	171,4	2800	51	ZE-8359-318	1.239,10
315	11	140	196,9	103	235	2800	51	ZE-8359-311	1.239,10
400	8	108	139,7	136	171,4	2000	101	ZE-8359-408	1.989,60
400	11	108	196,9	136	235	2000	101	ZE-8359-411	1.989,60

Inkl. je 1 Satz Dreh- und Bohrbacken, Spanschlüssel, Befestigungsbolzen
Incl. 1 set each of solid jaws internally / externally stepped, wrench, fixing bolts

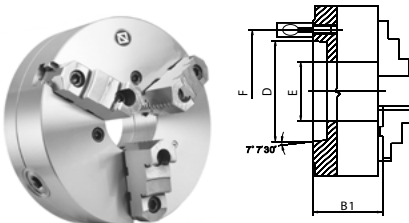

Kurzkegelaufnahme DIN 55029 (Camlock), geteilte Backen According to DIN 55029 (Camlock), two-piece jaws

Stahl / Steel

Ø mm	KK Taper	B1 mm	D mm	E mm	F mm	RPM _{MAX} min-1	kg	Art.-Nr./ Order no.	EUR
125	3	64,8	54	35,5	70,6	4800	5	ZE-8369-123	505,90
125	4	64,8	63,5	35,5	82,6	4800	5	ZE-8369-124	505,90
160	3	72,8	54	42	70,6	4500	9	ZE-8369-163	571,20
160	4	72,8	63,5	42	82,6	4500	9	ZE-8369-164	571,20
160	5	72,8	82,6	42	104,8	4500	9	ZE-8369-165	571,20
200	4	82,8	63,5	55	82,6	4000	19	ZE-8369-204	674,60
200	5	82,8	82,6	55	104,8	4000	19	ZE-8369-205	674,60
200	6	82,8	106,4	55	133,4	4000	19	ZE-8369-206	674,60
250	6	92,8	106,4	76	133,4	3500	32	ZE-8369-256	897,20
250	8	92,8	139,7	76	171,4	3500	32	ZE-8369-258	897,20
315	6	101,3	106,4	103	133,4	2800	51	ZE-8369-316	1.304,30
315	8	101,3	139,7	103	171,4	2800	51	ZE-8369-318	1.304,30
315	11	145	196,9	103	235	2800	51	ZE-8369-311	1.304,30
400	8	116,8	139,7	136	171,4	2000	101	ZE-8369-408	2.073,50
400	11	116,8	196,9	136	235	2000	101	ZE-8369-411	2.073,50

Inkl. je 1 Satz gehärteter Grund- und Umkehrsaufsatzbacken, Spanschlüssel, Befestigungsbolzen
Incl. 1 set each of hardened base jaws and reversible top jaws, wrench, fixing bolts